



MICROPROCESSOR  
CORE MODULE



# RABBITCORE® RCM3100 SERIES

A cost-effective solution that allows embedded engineers to add intelligence and I/O control to a wide variety of peripheral devices

Powered by the Rabbit® 3000 microprocessor, the compact RCM3100 series boasts powerful features and a small footprint (47 mm × 42 mm) to simplify integration. Its small size and ease of use when paired with Dynamic C® allow engineers to add device intelligence and I/O control for many of today's embedded applications. The RCM3100 series is ideal for applications requiring M2M connectivity and is pin-compatible with the RCM3000 series for cost-effective Ethernet and non-Ethernet systems.

Rabbit hardware and Dynamic C are designed in a complementary fashion for maximum performance and ease of use in embedded systems. The additional software components in Dynamic C allow you to add functionality for embedded application customization.

## BENEFITS

- Rabbit 3000 microprocessor at 30 MHz
- Up to 512K Flash/512K SRAM
- 54 digital I/O and 6 serial ports (IrDA, HDLC, asynch, SPI)
- 3.3V operation, low power “sleepy” modes (< 2mA)
- Compact size simplifies integration
- Ready-made platform for fast time-to-market, up to 3 months of design integration time savings
- Low-cost embedded microprocessor module
- Easily links to multiple serial devices

## RELATED PRODUCTS



RabbitCore®  
RCM3000  
Series



RabbitCore®  
RCM3400  
Series



RabbitCore®  
RCM3600  
Series




RabbitCore®  
RCM4100  
Series



Dynamic C®

## APPLICATION EXAMPLE

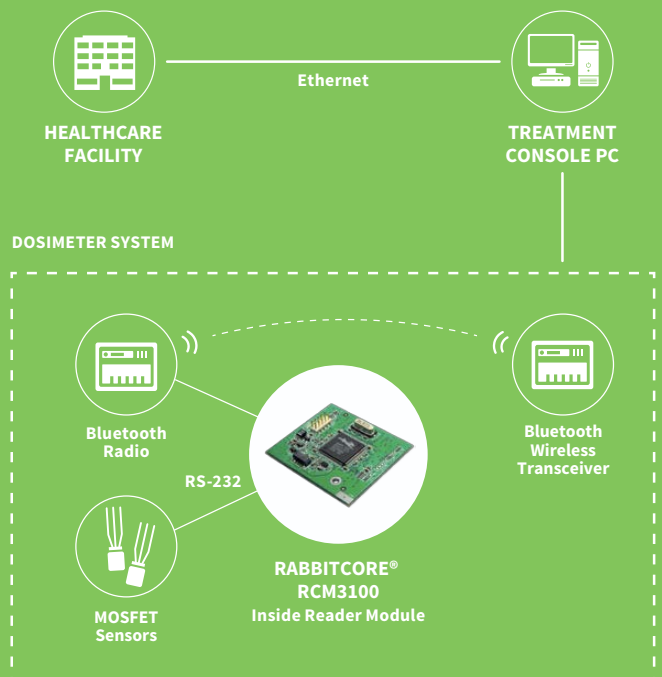



# SPECIFICATIONS

RCM3100

RCM3110

## FEATURE

|                            |                                                                                                                                                                                                                                                                                                                           |      |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| MICROPROCESSOR             | Rabbit 3000® at 30 MHz                                                                                                                                                                                                                                                                                                    |      |
| EMI REDUCTION              | Spectrum spreader for reduced EMI (radiated emissions)                                                                                                                                                                                                                                                                    |      |
| FLASH MEMORY               | 512K (2 × 256K)                                                                                                                                                                                                                                                                                                           | 256K |
| SRAM                       | 512K                                                                                                                                                                                                                                                                                                                      | 128K |
| BACKUP BATTERY             | Connection for user-supplied backup battery to support RTC and SRAM                                                                                                                                                                                                                                                       |      |
| GENERAL-PURPOSE I/O        | 54 parallel digital I/O lines: <ul style="list-style-type: none"><li>• 46 configurable I/O</li><li>• 4 fixed inputs</li><li>• 4 fixed outputs</li></ul>                                                                                                                                                                   |      |
| ADDITIONAL DIGITAL INPUTS  | 2 startup mode, reset in                                                                                                                                                                                                                                                                                                  |      |
| ADDITIONAL DIGITAL OUTPUTS | Status, reset out                                                                                                                                                                                                                                                                                                         |      |
| AUXILIARY I/O BUS          | 8 data lines and 6 address lines (shared with I/O) plus I/O read/write                                                                                                                                                                                                                                                    |      |
| SERIAL PORTS               | 6 shared high-speed, CMOS-compatible ports: <ul style="list-style-type: none"><li>• 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC (with IrDA)</li><li>• 1 asynchronous clocked serial port dedicated for programming</li><li>• Support for MIR/SIR IrDA transceiver</li></ul> |      |
| SERIAL RATE                | Max. asynchronous baud rate = CLK/8                                                                                                                                                                                                                                                                                       |      |
| SLAVE INTERFACE            | A slave port allows the RCM3100 to be used as a master or as an intelligent peripheral device with Rabbit-based or any other type of processor                                                                                                                                                                            |      |
| REAL-TIME CLOCK            | Yes                                                                                                                                                                                                                                                                                                                       |      |
| TIMERS                     | Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers                                                                                                                                                                                                                                   |      |
| WATCHDOG/SUPERVISOR        | Yes                                                                                                                                                                                                                                                                                                                       |      |
| PULSE-WIDTH MODULATORS     | 10-bit free-running counter and four pulse-width registers                                                                                                                                                                                                                                                                |      |
| INPUT CAPTURE              | 2-channel input capture can be used to time input signals from various port pins                                                                                                                                                                                                                                          |      |
| QUADRATURE DECODER         | 2-channel quadrature decoder accepts inputs from external incremental encoder modules                                                                                                                                                                                                                                     |      |
| POWER                      | 3.15V to 3.45 VDC 75 mA @ 3.3V                                                                                                                                                                                                                                                                                            |      |
| OPERATING TEMPERATURE      | -40° C to +85° C                                                                                                                                                                                                                                                                                                          |      |
| HUMIDITY                   | 5% to 95%, non-condensing                                                                                                                                                                                                                                                                                                 |      |
| BOARD SIZE                 | 1.850" × 1.650" × 0.55" (47 mm × 42 mm × 14 mm)                                                                                                                                                                                                                                                                           |      |

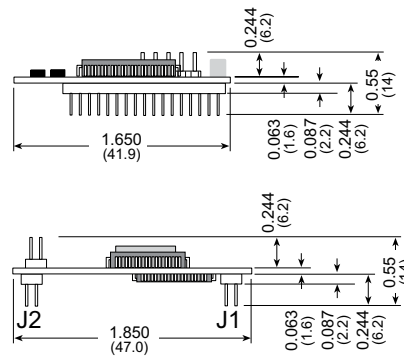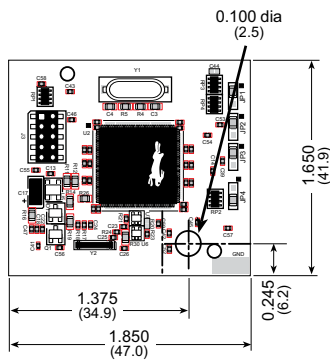

# PART NUMBERS

## DESCRIPTION

|                    |                                    |
|--------------------|------------------------------------|
| <b>20-101-0517</b> | RCM3100. 512K Flash, 512K SRAM     |
| <b>20-101-0518</b> | RCM3110. 256K Flash, 128K SRAM     |
| <b>101-0533</b>    | RCM3100 RabbitCore Development Kit |

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2015 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001603  
C1/915

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

