


- ※ Specifications
1. Voltage Rating : 30V_{AC}/DC
 2. Current Rating : 1.0A/Pin
 3. Operating temperature : -30°C~+85°C
 4. Mating Force : 3.5Kgf Max
 5. Un-Mating Force : 0.3Kgf Min
 4. Durability : 5,000 cycles
- ※ Plating
1. CONTACT
- CONTACT Area : Au 0.75μm Min over Ni 1.0~5.0μm
- Lead Area : Au Flash over Ni 0.2~3.0μm
 2. METAL COVER : Ni 1.0~5.0μm

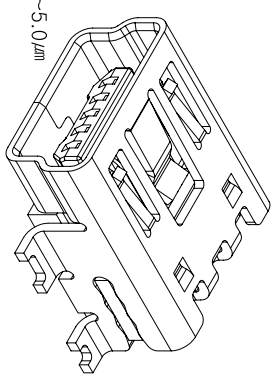

4	COVER TAPE	POLYIMIDE							
3	METAL COVER	Copper Alloy							10.4
2	CONTACT	Copper Alloy							10.2
1	HOUSING	Thermo Plastic							UL94V-0
No	Descriptions	Material							Remarks
General Tolerance		Scale	N/S	Units	mm	Sheet	1 of 1		
Dimension	mm (°)	Date	2005. 12. 05				TITLE		
X	± 0.2	Drawn	H. H. CHANG	Design		Checked		Reviewed	Approved
X.X	± 0.1								
X.XX	± 0.05								
X.XXX	± 0.01								
ANGLE	± 1°								
		HJ&C HYUP JIN I&C CO., LTD.		DWG No.	HI05-AG0110-A1		Rev.	0	