

AXIAL LEAD PACKAGE

DESCRIPTION

The 15KPA Series, are discrete 15,000 Watt, silicon transient voltage suppressors (TVS) designed for use in applications where large voltage transients can permanently damage voltage sensitive components and equipment.

The 15KPA series is available in voltages ranging from 17V to 280V with 5 percent and 10 percent tolerances. Both tolerances are referenced to the power supply output or operating voltage level. This series is compatible with IEC 61000-4-5 (Surge) requirements.

FEATURES

- RTCA DO-160G COMPLIANT PRODUCT
- UL File Recognition #E208219
- Compatible with IEC 61000-4-5 (Surge): 48A, 8/20 μ s - L3(Line-Ground), L4(Line-Line) & L1 (Power)
- 15,000 Watts Peak Pulse Power per Line (tp = 10/1000 μ s)
- Unidirectional and Bidirectional Configurations
- Easy Mounting to Printed Circuit Board
- tClamping (0V to V_{BR} Min.) < 1 x 10⁻¹² seconds theoretical
- Available in Multiple Voltages Ranging From 17V to 280V
- RoHS Complaint (Exemption #7)

APPLICATIONS

- Relay Drives
- Motor (Start/Stop) Back EMF Protection
- Module Lightning Protection
- Secondary Lightning Protection for AC/DC

MECHANICAL CHARACTERISTICS

- Molded Case
- Approximate Weight: 5 grams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- Flammability Rating UL 94V-0

CIRCUIT DIAGRAMS



UNIDIRECTIONAL



BIDIRECTIONAL

TYPICAL DEVICE CHARACTERISTICS

RTCA DO-160G COMPLIANT PRODUCT

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

| PARAMETER | SYMBOL | VALUE | UNITS |
|---|------------------|------------|-------|
| Peak Pulse Power (tp = 10/1000μs) - See Figure 1 | P _{PP} | 15,000 | Watts |
| Forward Surge Rating - 1/120 seconds - See Note 2 | I _F | 200 | Amps |
| Steady State Power Dissipation | P _P | 8.0 | Watts |
| Storage Temperature | T _{STG} | -55 to 150 | °C |
| Operating Temperature | T _L | -55 to 150 | °C |

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

| PART NUMBER (Notes 1 - 2) | RATED STAND-OFF VOLTAGE V _{WM} VOLTS | BREAKDOWN VOLTAGE | | MAXIMUM LEAKAGE CURRENT @V _{WM} I _D μA | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000μS V _C @ I _{PP} | TEMPERATURE COEFFICIENT OF V _(BR) qV _(BR) mV/°C |
|------------------------------|---|--------------------------------|-----------------------|---|---|---|
| | | MIN V _(BR) VOLTS | @I _T mA | | | |
| 15KPA17 | 17.0 | 18.9 | 50 | 5000 | 32.3V @ 464.0A | 19 |
| 15KPA17A | 17.0 | 18.9 | 50 | 5000 | 29.3V @ 512.0A | 17 |
| 15KPA18 | 18.0 | 20.0 | 50 | 5000 | 34.2V @ 439.0A | 20 |
| 15KPA18A | 18.0 | 20.0 | 50 | 5000 | 30.9V @ 485.0A | 18 |
| 15KPA20 | 20.0 | 22.2 | 20 | 1500 | 37.9V @ 396.0A | 24 |
| 15KPA20A | 20.0 | 22.2 | 20 | 1500 | 34.3V @ 437.0A | 21 |
| 15KPA22 | 22.0 | 24.4 | 10 | 500 | 41.1V @ 365.0A | 27 |
| 15KPA22A | 22.0 | 24.4 | 10 | 500 | 37.1V @ 404.0A | 24 |
| 15KPA24 | 24.0 | 26.7 | 5 | 150 | 45.0V @ 333.0A | 30 |
| 15KPA24A | 24.0 | 26.7 | 5 | 150 | 40.7V @ 369.0A | 27 |
| 15KPA26 | 26.0 | 28.9 | 5 | 50 | 48.7V @ 308.0A | 32 |
| 15KPA26A | 26.0 | 28.9 | 5 | 50 | 44.0V @ 341.0A | 29 |
| 15KPA28 | 28.0 | 31.1 | 5 | 25 | 52.4V @ 286.0A | 35 |
| 15KPA28A | 28.0 | 31.1 | 5 | 25 | 47.5V @ 316.0A | 31 |
| 15KPA30 | 30.0 | 33.3 | 5 | 15 | 56.2V @ 267.0A | 27 |
| 15KPA30A | 30.0 | 33.3 | 5 | 15 | 50.7V @ 296.0A | 34 |
| 15KPA33 | 33.0 | 36.7 | 5 | 10 | 60.6V @ 248.0A | 42 |
| 15KPA33A | 33.0 | 36.7 | 5 | 10 | 54.8V @ 274.0A | 38 |
| 15KPA36 | 36.0 | 40.0 | 5 | 10 | 66.0V @ 227.0A | 46 |
| 15KPA36A | 36.0 | 40.0 | 5 | 10 | 59.7V @ 251.0A | 41 |
| 15KPA40 | 40.0 | 44.4 | 5 | 10 | 72.8V @ 206.0A | 51 |
| 15KPA40A | 40.0 | 44.4 | 5 | 10 | 65.8V @ 228.0A | 46 |
| 15KPA43 | 43.0 | 47.8 | 5 | 10 | 77.1V @ 195.0A | 55 |
| 15KPA43A | 43.0 | 47.8 | 5 | 10 | 69.7V @ 215.0A | 50 |
| 15KPA45 | 45.0 | 50.0 | 5 | 10 | 80.7V @ 186.0A | 57 |
| 15KPA45A | 45.0 | 50.0 | 5 | 10 | 73.0V @ 205.0A | 52 |

TYPICAL DEVICE CHARACTERISTICS

RTCA DO-160G COMPLIANT PRODUCT

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

| PART NUMBER (Notes 1 - 2) | RATED STAND-OFF VOLTAGE V_{WM} VOLTS | BREAKDOWN VOLTAGE | | MAXIMUM LEAKAGE CURRENT $@V_{WM}$ I_D μA | MAXIMUM CLAMPING VOLTAGE (Fig. 2) $@ 10/1000\mu S$ $V_C @ I_{PP}$ | TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $qV_{(BR)}$ $mV/^\circ C$ |
|------------------------------|--|-------------------------|--------------|--|---|---|
| | | MIN $V_{(BR)}$ VOLTS | $@I_T$ mA | | | |
| 15KPA48 | 48.0 | 53.3 | 5 | 10 | 85.9V @ 175.0A | 62 |
| 15KPA48A | 48.0 | 53.3 | 5 | 10 | 77.7V @ 193.0A | 56 |
| 15KPA51 | 51.0 | 56.7 | 5 | 10 | 91.5V @ 164.0A | 66 |
| 15KPA51A | 51.0 | 56.7 | 5 | 10 | 82.8V @ 181.0A | 60 |
| 15KPA54 | 54.0 | 60.0 | 5 | 10 | 96.8V @ 155.0A | 70 |
| 15KPA54A | 54.0 | 60.0 | 5 | 10 | 87.5V @ 171.0A | 63 |
| 15KPA58 | 58.0 | 64.4 | 5 | 10 | 104.0V @ 144.0A | 76 |
| 15KPA58A | 58.0 | 64.4 | 5 | 10 | 94.0V @ 160.0A | 68 |
| 15KPA60 | 60.0 | 66.7 | 5 | 10 | 107.0V @ 140.0A | 78 |
| 15KPA60A | 60.0 | 66.7 | 5 | 10 | 97.3V @ 154.0A | 71 |
| 15KPA64 | 64.0 | 71.1 | 5 | 10 | 115.0V @ 130.0A | 84 |
| 15KPA64A | 64.0 | 71.1 | 5 | 10 | 104.0V @ 144.0A | 76 |
| 15KPA70 | 70.0 | 77.8 | 5 | 10 | 126.0V @ 119.0A | 92 |
| 15KPA70A | 70.0 | 77.8 | 5 | 10 | 114.0V @ 132.0A | 83 |
| 15KPA75 | 75.0 | 83.3 | 5 | 10 | 135.0V @ 111.0A | 100 |
| 15KPA75A | 75.0 | 83.3 | 5 | 10 | 122.0V @ 123.0A | 89 |
| 15KPA78 | 78.0 | 86.7 | 5 | 10 | 140.0V @ 107.0A | 104 |
| 15KPA78A | 78.0 | 86.7 | 5 | 10 | 126.0V @ 119.0A | 93 |
| 15KPA85 | 85.0 | 94.4 | 5 | 10 | 152.0V @ 99.0A | 113 |
| 15KPA85A | 85.0 | 94.4 | 5 | 10 | 137.0V @ 109.0A | 102 |
| 15KPA90 | 90.0 | 100.0 | 5 | 10 | 160.0V @ 94.0A | 120 |
| 15KPA90A | 90.0 | 100.0 | 5 | 10 | 146.0V @ 103.0A | 109 |
| 15KPA100 | 100.0 | 111.0 | 5 | 10 | 179.0V @ 84.0A | 134 |
| 15KPA100A | 100.0 | 111.0 | 5 | 10 | 162.0V @ 93.0A | 121 |
| 15KPA110 | 110.0 | 122.0 | 5 | 10 | 196.0V @ 77.0A | 147 |
| 15KPA110A | 110.0 | 122.0 | 5 | 10 | 178.0V @ 84.0A | 133 |
| 15KPA120 | 120.0 | 133.0 | 5 | 10 | 214.0V @ 70.0A | 161 |
| 15KPA120A | 120.0 | 133.0 | 5 | 10 | 193.0V @ 78.0A | 145 |
| 15KPA130 | 130.0 | 144.0 | 5 | 10 | 231.0V @ 65.0A | 174 |
| 15KPA130A | 130.0 | 144.0 | 5 | 10 | 209.0V @ 72.0A | 157 |
| 15KPA150 | 150.0 | 167.0 | 5 | 10 | 268.0V @ 56.0A | 202 |
| 15KPA150A | 150.0 | 167.0 | 5 | 10 | 243.0V @ 62.0A | 183 |
| 15KPA160 | 160.0 | 178.0 | 5 | 10 | 287.0V @ 52.0A | 216 |
| 15KPA160A | 160.0 | 178.0 | 5 | 10 | 259.0V @ 58.0A | 195 |

TYPICAL DEVICE CHARACTERISTICS

RTCA DO-160G COMPLIANT PRODUCT

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

| PART NUMBER (Notes 1 - 2) | RATED STAND-OFF VOLTAGE V_{WM} VOLTS | BREAKDOWN VOLTAGE | | MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000 μS V_C @ I_{PP} | TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $qV_{(BR)}$ mV/°C |
|------------------------------|--|-------------------------|---------------|---|--|---|
| | | MIN $V_{(BR)}$ VOLTS | @ I_T mA | | | |
| 15KPA170 | 170.0 | 189.0 | 5 | 10 | 304.0V @ 49.0A | 229 |
| 15KPA170A | 170.0 | 189.0 | 5 | 10 | 275.0V @ 55.0A | 207 |
| 15KPA180 | 180.0 | 200.0 | 5 | 10 | 321.0V @ 47.0A | 242 |
| 15KPA180A | 180.0 | 200.0 | 5 | 10 | 291.0V @ 52.0A | 219 |
| 15KPA200 | 200.0 | 222.0 | 5 | 10 | 356.0V @ 42.0A | 269 |
| 15KPA200A | 200.0 | 222.0 | 5 | 10 | 322.0V @ 47.0A | 243 |
| 15KPA220 | 220.0 | 245.0 | 5 | 10 | 393.0V @ 38.0A | 297 |
| 15KPA220A | 220.0 | 245.0 | 5 | 10 | 356.0V @ 42.0A | 269 |
| 15KPA240 | 240.0 | 267.0 | 5 | 10 | 428.0V @ 35.0A | 324 |
| 15KPA240A | 240.0 | 267.0 | 5 | 10 | 388.0V @ 39.0A | 293 |
| 15KPA260 | 260.0 | 289.0 | 5 | 10 | 464.0V @ 32.0A | 352 |
| 15KPA260A | 260.0 | 289.0 | 5 | 10 | 419.0V @ 36.0A | 317 |
| 15KPA280 | 280.0 | 311.0 | 5 | 10 | 500.0V @ 30.0A | 378 |
| 15KPA280A | 280.0 | 311.0 | 5 | 10 | 452.0V @ 33.0A | 342 |

NOTES

- Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as 15KPA20CA.
- $V_f = 7.5$ Volts @ 200A, 8.3ms(1/2 Sine Wave) - Unidirectional devices only.

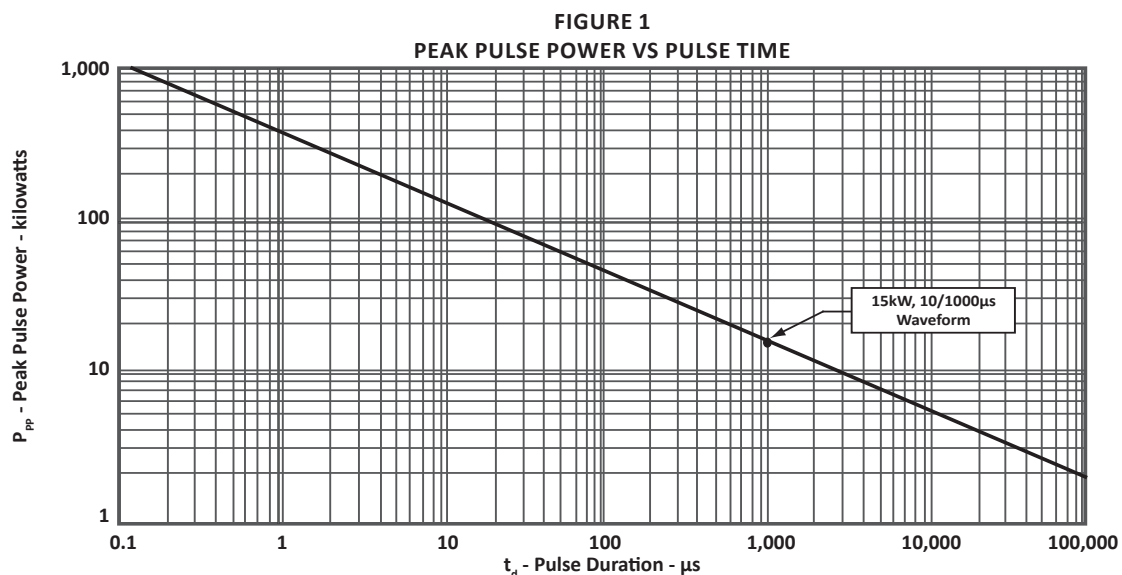


FIGURE 2
PULSE WAVEFORM

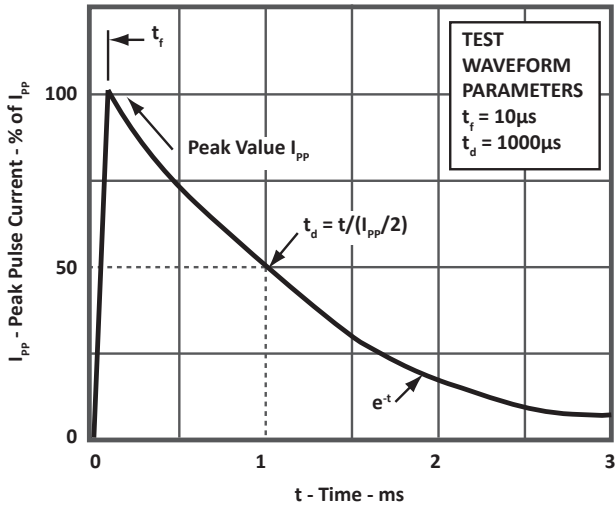


FIGURE 3
POWER DERATING CURVE


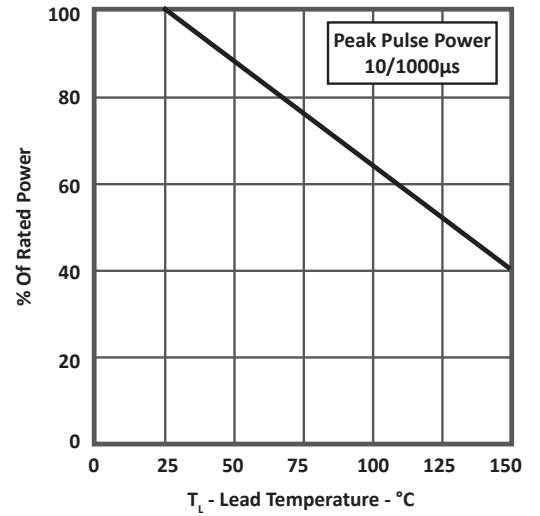


FIGURE 4
TYPICAL JUNCTION CAPACITANCE

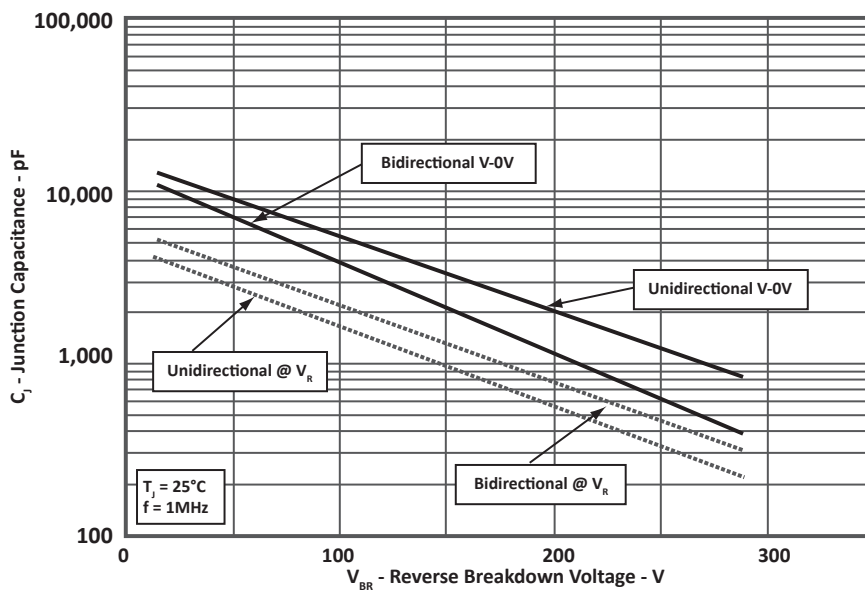

AXIAL LEAD PACKAGE INFORMATION


RTCA DO-160G COMPLIANT PRODUCT

OUTLINE DIMENSIONS

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-----------|------------|------------|
| | MIN | MAX | MIN | MAX |
| A | 24.5 | - | 1.00 | - |
| B | 8.60 | 9.10 | 0.34 | 0.36 |
| C | 24.5 | - | 1.00 | - |
| D | 1.20 DIA. | 1.30 DIA. | 0.048 DIA. | 0.052 DIA. |
| E | 8.60 | 9.10 | 0.34 | 0.36 |

NOTES

1. Dimensions are exclusive of mold flash and metal burrs.

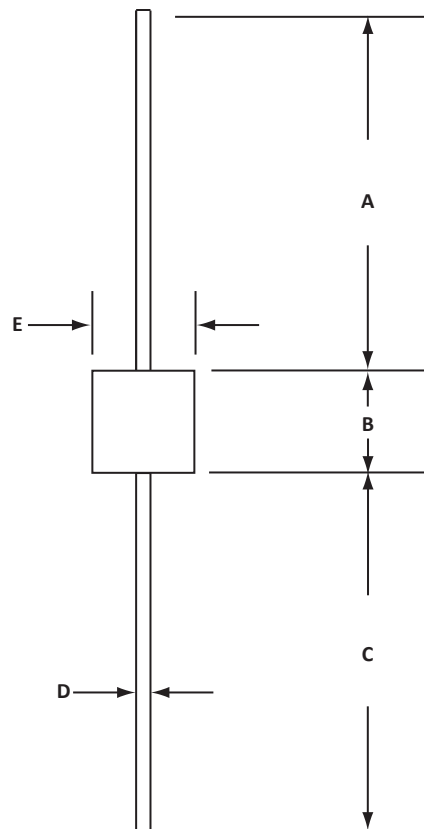

ORDERING INFORMATION

| BASE PART NUMBER (xx = Voltage) | LEADFREE SUFFIX | TAPE SUFFIX | QTY/REEL | REEL SIZE | TUBE QTY |
|------------------------------------|-----------------|-------------|----------|-----------|----------|
| 15KPAxx | -LF | n/a | n/a | n/a | n/a |
| 15KPAxxA | -LF | n/a | n/a | n/a | n/a |
| 15KPAxxCA | -LF | n/a | n/a | n/a | n/a |

NOTES

1. Marking on Part - logo, part number, date code and positive terminal marked with band (unidirectional only).

MARKING DIAGRAM



Package outline per document number 06028.R2 9/09.

COMPANY INFORMATION**RTCA DO-160G COMPLIANT PRODUCT****COMPANY PROFILE**

In business more than 20 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers high performance interface and linear products. They include analog switches; multiplexers; LED drivers; LED wafer die for ESD protection; audio control ICs; RF and related high frequency products.

CONTACT US**Corporate Headquarters**

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 1998 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.